





PLAN

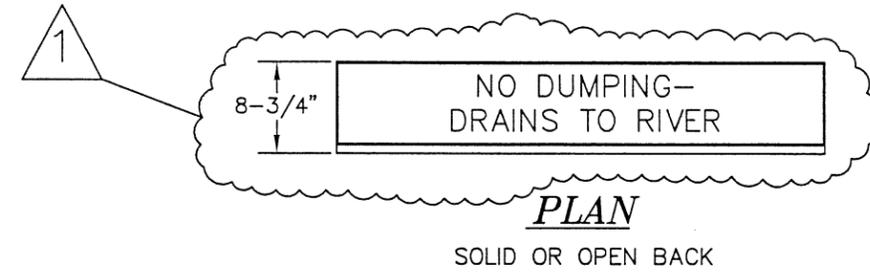

SIDE VIEW

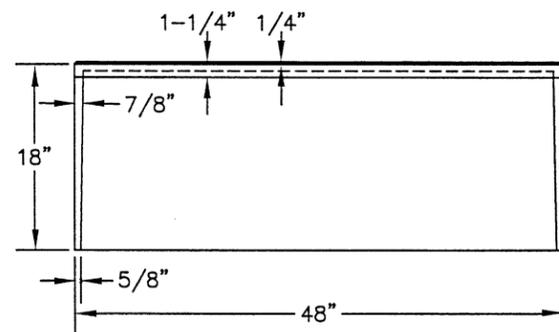


FRONT VIEW
SOLID BACK

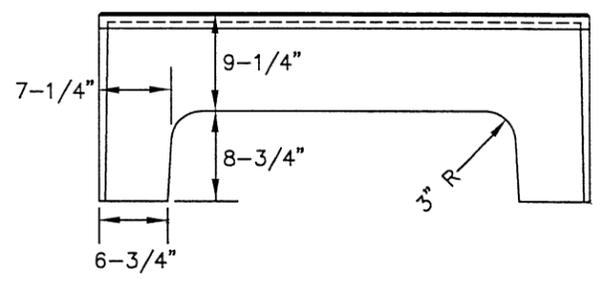

FRONT VIEW
OPEN BACK

CURB IRON OR UPRIGHT FRAME

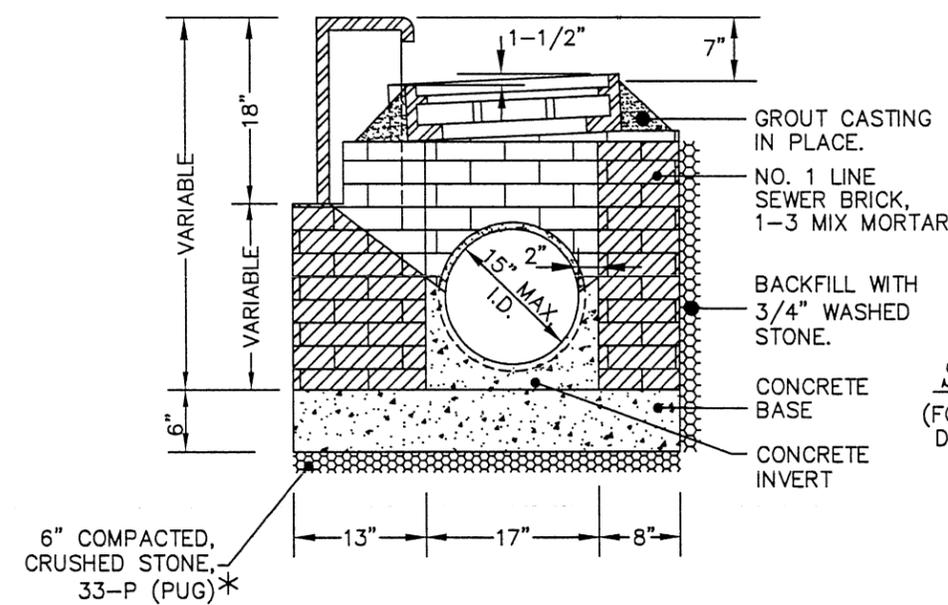



SECTION A-A
(FOR CLARITY, THE CROSS DRAIN IS NOT SHOWN.)

CATCH BASIN WITH BACK

* "33-P (PUG)" - 303-01, TYPE A, GRADING D ("33-P"), TENNESSEE D.O.T. SPECIFICATIONS.

NOTE
FOR BRICK CONSTRUCTION, JOINTS SHALL ALWAYS BE COMPLETELY FILLED WITH MORTAR. BRICKS SHALL BE LAID WITH VERTICAL MORTAR JOINTS NOT MORE THAN 3/8" THICK AND HORIZONTAL MORTAR JOINTS NOT LESS THAN 3/8" THICK AT THE INSIDE FACE. INSIDE JOINTS SHALL BE TROWEL STRUCK, FLUSH JOINTS TO PROVIDE A SMOOTH, CLEAN SURFACE, WHILE OUTSIDE WALLS SHALL BE ENTIRELY COVERED WITH MORTAR FOR A SMOOTH, CLEAN SURFACE.

F:\STDDWGS\StdCatchBasin\STDCB1_1.dwg

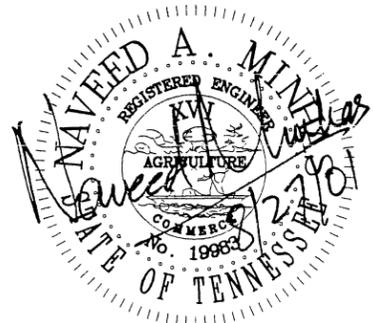

1	REVISIONS AS MARKED OR CLOUDED	8/24/01
0	INITIAL ISSUE	12/10/99
NO.	REVISION	DATE

CITY OF CHATTANOOGA AND HAMILTON COUNTY	
CATCH BASIN (STANDARD), FRAME, AND GRATE	
DATE OF ORIGINAL ISSUE DECEMBER 10, 1999	STANDARD NUMBER: SD-608.01