


INSTALL SOLDIER COURSE
AROUND UTILITY COLLAR.

12" MINIMUM
(TYPICAL)
ALL SIDES

CORNER TIE BAR

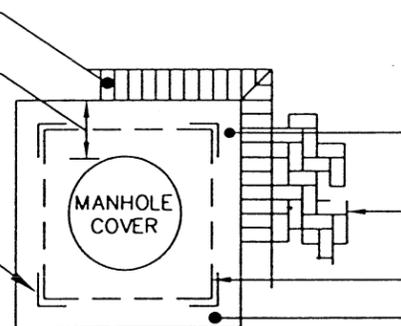

COLORED TO MATCH
ADJACENT CONCRETE
PAVERS OR STAMPING

90° HERRINGBONE
STAMPING

BAR - SEE SECTION BELOW
FOR SIZE AND LOCATION.

CONCRETE COLLAR WITH
COARSE BROOM FINISH

NOTE
FOR COLOR MIX, SEE
CONCRETE COLOR CHART
ON STANDARD DRAWING
SD-503.01.


PLAN

INSTALL SOLDIER COURSE
AROUND UTILITY COLLAR.

CORNER TIE BAR
COLORED TO MATCH
ADJACENT CONCRETE
PAVERS OR STAMPING

12" MINIMUM
(TYPICAL)
ALL SIDES

CONCRETE COLLAR WITH
COARSE BROOM FINISH




90° HERRINGBONE
STAMPING

BARS - SEE SECTION BELOW
FOR SIZES AND LOCATIONS.

PLAN

ONE #4 BAR,
2" MINIMUM
CLEARANCE

BRICK PAVERS
(OR CONCRETE
SIDEWALK)

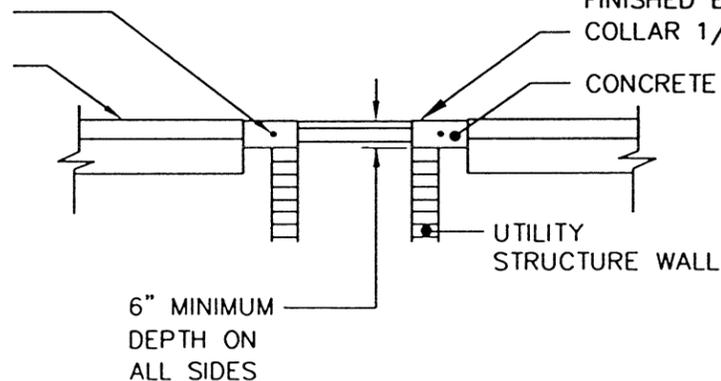

FINISHED ELEVATION OF CONCRETE
COLLAR 1/4" BELOW PAVERS


CONCRETE COLLAR

UTILITY
STRUCTURE WALL

6" MINIMUM
DEPTH ON
ALL SIDES

TYPICAL SECTION

UTILITY COLLAR - SIDEWALK

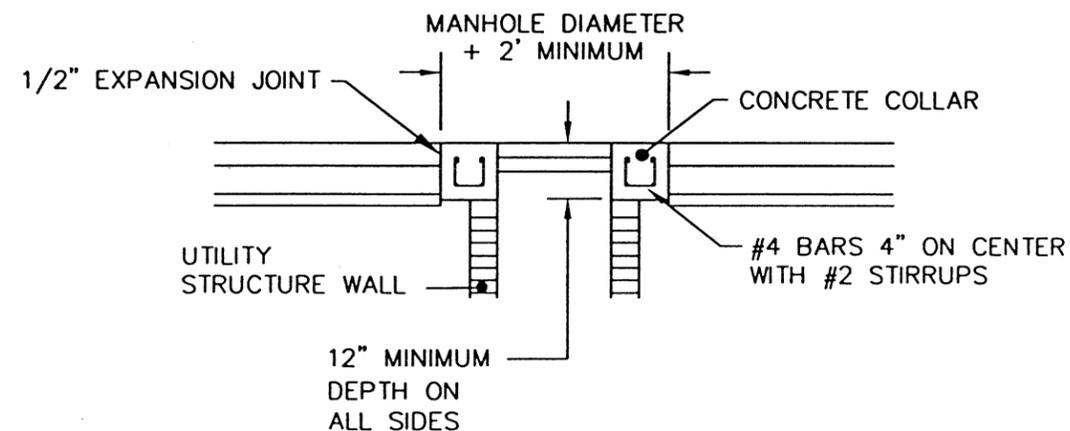

MANHOLE DIAMETER
+ 2' MINIMUM

CONCRETE COLLAR

#4 BARS 4" ON CENTER
WITH #2 STIRRUPS

12" MINIMUM
DEPTH ON
ALL SIDES

TYPICAL SECTION

UTILITY COLLAR - ROADWAY

NOTES

1. ALL BARS SHALL BE 60 K.S.I. DEFORMED BARS.
2. CONCRETE UTILITY COLLARS SHALL BE SQUARE AND AT RIGHT ANGLES TO THE BRICK PATTERN.



0	INITIAL ISSUE	12/10/99
NO.	REVISION	DATE

CITY OF CHATTANOOGA AND HAMILTON COUNTY

STREETSCAPE UTILITY COLLAR DETAILS

DATE OF ORIGINAL ISSUE
DECEMBER 10, 1999

STANDARD NUMBER: **SD-502.01**